



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ :

H04N 5/50

A1

(11) International Publication Number:

WO 96/10888

(43) International Publication Date:

11 April 1996 (11.04.96)

(21) International Application Number: PCT/US95/10662

(22) International Filing Date: 22 August 1995 (22.08.95)

(30) Priority Data:

08/316,503

30 September 1994 (30.09.94) US

(71) Applicant: INTEL CORPORATION [US/US]; 2200 Mission College Boulevard, Santa Clara, CA 95052 (US).

(72) Inventors: ADAMS, Robert; 17606 Cardinal Road, Lake Oswego, OR 97034 (US). WILLIAMS, David, M.; 2731 S.W. Bucharest Court, Portland, OR 97225 (US). RICHARDSON, John; 2748 N.E. 19th Avenue, Portland, OR 97212 (US). PERRY, Burt; 8145 S.W. Barnard Drive, Beaverton, OR 97007 (US).


(74) Agents: SALTER, James, H. et al.; Blakely, Sokoloff, Taylor & Zafman, 7th floor, 12400 Wilshire Boulevard, Los Angeles, CA 90024-1026 (US).

(81) Designated States: AM, AT, AT (Utility model), AU, BB, BG, BR, BY, CA, CH, CN, CZ, CZ (Utility model), DE, DE (Utility model), DK, DK (Utility model), EE, EE (Utility model), ES, FI, FI (Utility model), GB, GE, HU, IS, JP, KE, KG, KP, KR, KZ, LK, LR, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK (Utility model), TJ, TM, TT, UA, UG, UZ, VN, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG), ARIPO patent (KE, MW, SD, SZ, UG).

Published

With international search report.

(54) Title: CONTENT PROGRAMMER CONTROL OF VIDEO AND DATA DISPLAY USING ASSOCIATED DATA

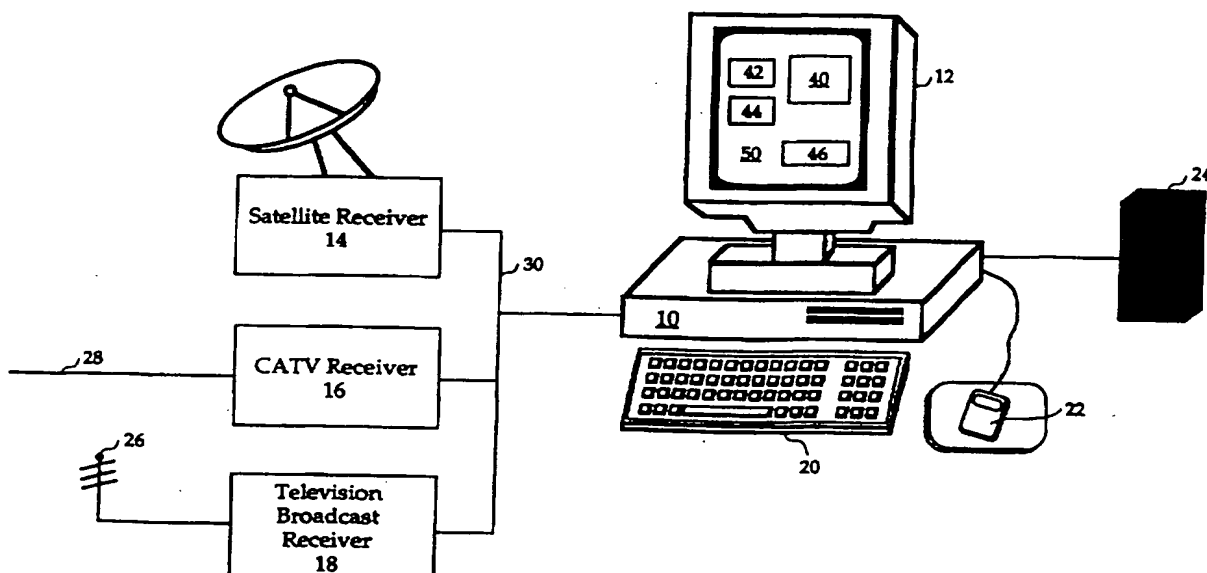

(57) Abstract

An interactive video system is disclosed that processes a video data stream and an associated data stream corresponding to the video data stream. The interactive video system displays a video image defined by the video data stream on a display device (50) and performs interactive command functions specified by the associated data stream. The interactive command functions include commands that specify placement of a video display window (40), commands that specify parameters of graphical objects (44) that are associated with the video image and commands that specify pixel data or graphics description for the graphical object and commands for placement of selection windows (42) and that specify interactive functions for the selection windows.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

-1-

CONTENT PROGRAMMER CONTROL OF VIDEO AND DATA DISPLAY USING ASSOCIATED DATA

BACKGROUND OF THE INVENTION

5

1. FIELD OF THE INVENTION:

The present invention pertains to the field of computer systems. More particularly, this invention relates to the coordination of video and audio data streams using associated data streams to enable content programmer control of display and selection functions for a video system.

10

2. BACKGROUND:

15

In prior television systems, a video content programmer typically controls the entire video display screen by selecting the video programming, the presentation of the video programming, and the programming flow. Typically, such a content programmer maintains total control over the coloring, the style, and the presentation of images on the video display screen.

20

In contrast, the presentation of video on a computer system is typically limited by an operating system's styles and conventions. A typical operating system for a computer system imposes a particular

25

-2-

display style that confine programs executed on the computer system. In the case of video windows on such a computer system, a content programmer is usually limited to the standard look of the particular operating system and may not vary too far from the standard look.

5

However, as such computer systems become more commonly used for the presentation of consumer items, content programmers may seek more control over the look and feel of computer system video. Such control would enable content programmers to select a
10 look and feel closely identified with the products being displayed. Such control would require that the content programmer control the video information as well as other elements on the video display screen including colors, logos and selection button placement. Unfortunately, such control over the look and feel of video displays
15 on a computer system is generally unavailable to content programmers on prior television receiving systems.

Prior television receiving systems merely provide mechanisms for including data associated with an incoming video signal. Such
20 associated data is typically received during vertical blanking intervals of the incoming video signal. In such prior systems, the functions of the associated data in relation to the incoming video signal is usually fixed according to the design of the television receiving system.

-3-

For example, some prior television receivers include a mechanism for decoding and displaying closed caption information that corresponds to the incoming video signal. In such a system, the closed caption associated data of the incoming video signal is usually
5 decoded and displayed with video characters superimposed over the normal incoming video scene.

Other prior video receivers decode the associated data of the incoming video stream and transfer the decoded data through an
10 input/output port of the receiver. Typically in such systems, the function of the input/output port is fixed according to a predetermined design of the receiver. Unfortunately, such systems impose fixed and inflexible functions to video content programmers where the receiving device is a computer.

15 In addition, some prior video receiving systems provide rudimentary interactive video functions. In such systems, selection regions of the video display are typically encoded into the incoming video signal. Such selection region information usually specifies
20 areas of the video display that correspond to a predetermined selection function according to the content of the incoming video signal. The video receiver in such prior systems typically includes a pointing device that enables a user to position a pointer within a selection region and select the corresponding function.

25

-4-

Unfortunately, such prior interactive video systems provide only limited selection and control functions for interactive video such as specifying regions for picking underlying video objects. Typically, such prior systems do not enable video content programmers to

5 exercise flexible control over an entire range of interactive video functions including the sizing and placement of video objects over the entire display.

-5-

SUMMARY AND OBJECTS OF THE INVENTION

One object of the present invention is to provide flexible content programming control in an interactive video system.

5

Another object of the present invention is to enable a content programmer to create a video display screen from a programming studio and to flexibly control the area around the video display including the placement of text, the definition and placement of graphical objects and to provide download information to the computer system and place buttons on the video display to select the downloaded information wherein the additional display information is in sync with the video and audio information.

10

Another object of the present invention is to provide an interactive video system controlled by an associated data stream corresponding to a video data stream.

15

Another object of the present invention is to provide an interactive video system wherein the associated data stream determines placement of a video display window on a display device.

Another object of the present invention is to provide an interactive video system wherein the associated data stream

-6-

determines placement and functionality of selection regions that correspond to a video image in the video display window.

5 A further object of the present invention is to provide an interactive video system wherein the associated data stream determines the placement and pixel content of graphical objects on the display device that correspond to the video image.

10 Another object of the present invention is to provide an interactive video system that employs the vertical blanking intervals of the video frames of a video signal or chrominance, sideband, or audio sub carrier signals to transfer the associated data stream.

15 Another object of the present invention is to provide a video system that employs packetized digital data streams to provide a video stream, an audio stream and a command and control associated data stream.

20 These and other objects of the invention are provided by a video system that receives a video data stream and an associated data stream corresponding to the video data stream via a broadcast receiver, a CATV link, or a packetized digital communication link. The video system displays a video image defined by the video data stream on a display device and performs command functions
25 specified by the associated data stream.

-7-

The command functions include commands that specify parameters that determine an area on a display surface of the display device for placement of a video display window that contains the video image. The command functions include commands that specify parameters of graphical objects that corresponds to the video image and commands that specify pixel data for the graphical objects. The command functions include commands that specify parameters for placement of selection windows that correspond to the video image and commands that specify functions performed if a user selects the selection windows.

One embodiment of the present invention is employed in a computer enhanced video shopping system. For this embodiment, a portion of a video display screen is allocated to the display of an incoming video program. The remainder of the video display screen contains information that describes items being displayed along with manufacturing logos for the items being displayed on the video display. The remainder of the video display screen includes selection regions or buttons to enable a viewer to select more detailed information regarding the items being displayed and related items for sale. In addition, the remainder of the video display contains additional text and graphics that provides information on future items for display.

-8-

Other objects, features and advantages of the present invention will be apparent from the accompanying drawings, and from the detailed description that follows below.

BRIEF DESCRIPTION OF THE DRAWINGS

The present invention is illustrated by way of example and not limitation in the figures of the accompanying drawings in which like
5 references indicate similar elements, and in which:

Figure 1 illustrates an interactive video system for one embodiment that receives data streams through a satellite receiver, a cable television (CATV) receiver, or a television broadcast receiver;
10

Figure 2 illustrates a computer system for one embodiment including a graphics display subsystem that drives a display device, a data modem that receives data streams, and an audio subsystem that drives a speaker;
15

Figure 3 illustrates the data modem for one embodiment which comprises a data selector, a video queue, an audio queue, and an associated data queue;

20 Figure 4 illustrates a digitized representation of an analog video signal received by the data selector from either the CATV receiver or the television broadcast receiver for one embodiment;

-10-

Figure 5 illustrates a packetized digital data stream received by the data selector for one embodiment which illustrates the format of a video packet, an audio packet, and an associated data packet;

- 5 Figure 6 illustrates the software architecture for the computer system for one embodiment which includes a data stream manager and an operating system;

- 10 Figure 7 is a flow diagram illustrating the functions of the data stream manager for one embodiment, wherein the client runtime manager processes the video, audio, and associated data streams to perform interactive video functions.

- 15 Figure 8 shows an example video screen that can be created with the technology described herein.

-11-

DETAILED DESCRIPTION

Figure 1 illustrates an interactive video system for one embodiment. The interactive video system comprises a computer system 10, along with a display device 12, a keyboard 20, a mouse pointing device 22, and a speaker 24. The interactive video system further comprises a satellite receiver 14, a cable television (CATV) receiver 16, or a television broadcast receiver 18.

10 The satellite receiver 14 enables reception of packetized digital data streams over a satellite link. For one embodiment, the incoming packetized digital data streams received by the satellite receiver 14 conform to the motion picture engineering group (MPEG) video transport standard. The packetized digital data streams received by the
15 satellite receiver 14 include video data packets, audio data packets, and associated data packets. The satellite receiver 14 transfers the received digital data stream packets to the computer system 10 over a communication line 30.

20 The CATV receiver 16 enables reception of an analog or digital video signal over a coaxial transmission line 28. The analog video signal over the coaxial transmission line 28 comprises a CATV cable television link. The CATV receiver 16 digitizes the incoming analog video signal and transfers the corresponding digitized video signal to
25 the computer system 10 over the communication line 30.

-12-

Alternatively, the CATV receiver 16 transfers the incoming analog video signal to the computer system 10 over the communication line 30.

5 The television broadcast receiver 18 enables reception of an analog video signal transmitted over the air through an antenna 26. The television broadcast receiver 18 receives and demodulates the incoming broadcast analog video signal, performs analog to digital conversion on the analog video signal to generate a corresponding
10 digital video signal. The television broadcast receiver 18 transfers the incoming digital video signal to the computer system 10 over the communication line 30.

For one embodiment, the computer system 10 receives the
15 packetized digital data stream from the satellite receiver 14 over the communication line 30. The computer system 10 extracts the video data packets from the incoming packetized digital data stream and generates a corresponding video image in a video window 40 on a display surface 50 of the display device 12. The computer system 10
20 also extracts audio data packets of the incoming packetized digital data stream on the communication line 30 and generates a corresponding analog audio signal to drive the speaker 24.

The computer system 10 extracts associated data packets of the
25 incoming packetized digital data stream on the communication line

-13-

30 and decodes the associated data packets according to a predefined video command and control protocol. The associated data packets received over the communication line 30 specify a selection region 42 on the display surface 50. The incoming associated data packets specify the position of the selection region 42 on the display surface 50. The associated data packets on the communication line 30 also specify a graphical display icon 44 for the display surface 50. In addition, the associated data packets specify the graphical content of the icon 44 as well as the positioning of the icon 44 on the display surface 50.

10

The incoming associated data packets received over the communication line 30 specify an information display window 46 on the display surface 50. The associated data packets specify a position for the information display window 46 and the video window 40 on the display surface 50 as well as the display content of the information display window 46.

For another embodiment, the computer system 10 receives a digitized representation of the incoming analog video signal from either the CATV receiver 16 or the television broadcast receiver 18 over the communication line 30. The incoming digitized video signal comprises a series of video frames each comprising a series of video scan intervals and a vertical blanking interval. The computer system 10 extracts the video information for the video window 40 during the video scan intervals of each received video frame over the

-14-

communication line 30. The computer system 10 extracts the corresponding audio information for the speaker 24 during the video scan interval of the incoming video data frames.

5 In addition, the computer system 10 extracts associated data for the incoming video signal during vertical blanking intervals of the incoming video data frames. The computer system 10 decodes the extracted associated data according to the predefined video command and control protocol. The associated data specifies the parameters for
10 the selection region 42. The associated data also specifies the position and content of the graphical display icon 44. The associated data specifies the parameters for the information display window 46 and the video window 40 as well as the display content of the information display window 46.

15 Figure 2 illustrates the computer system 10 for one embodiment. The computer system 10 comprises a processor 52, a memory subsystem 54, a graphics display subsystem 56. The computer system 10 further comprises a data modem 58, a disk drive 60, an
20 audio subsystem 62. The processor 52 communicates with the memory subsystem 54, the graphics display subsystem 56, the data modem 58, the disk drive 60, and the audio subsystem 62 via a system bus 51.

-15-

The memory subsystem 54 provides memory storage areas for an operating system, application programs, device driver programs, and associated data structures for the computer system 10. For one embodiment, the memory subsystem 54 comprises a dynamic random access memory (DRAM) subsystem. The disk drive 60 provides large scale mass storage to the computer system for programs and associated data structures.

The graphics display subsystem 56 performs graphics rendering functions and includes a frame buffer and associated circuitry to drive the display device 12. The graphics display subsystem 56 enables software executing on the processor 52 to generate display windows on the display device 12 including video display windows. The graphics display subsystem 56 also enables user selection functions from the display surface 50 the display device 12 via the mouse pointing device 22.

The audio subsystem 62 enables software executing on the processor 52 to render audio data and includes circuitry that drives the speaker 24. The audio subsystem 62 receives digitized audio data over the system bus 51 and generates a corresponding analog audio signal to drive the speaker 24.

The data modem 58 receives incoming digital data streams over the communication line 30. For one embodiment, the digital data

-16-

streams received over the communication line 30 comprise packetized digital data streams from the satellite receiver 14. For another embodiment, the digital data stream received over the communication line 30 comprises a digitized representation of the analog video signal received either by the CATV receiver 16 or the television broadcast receiver 18.

The data modem 58 enables software executing on the processor 52 to extract the video data, the audio data, and the associated data from the incoming digital data on the communication line 30. The software executing on the processor 52 thereafter distributes the video data for display on the display device 12 through the graphics display subsystem 56. The processor 52 distributes the incoming audio data to the audio subsystem 62 to drive the speaker 24. The processor 52 extracts the associated data through the data modem 58 and performs the interactive video functions specified by the associated data.

Figure 3 illustrates the data modem 58 for one embodiment. The data modem 58 comprises, a data selector 76, a video queue 70, an audio queue 72, an associated data queue 74 and an address filter 75. The data selector 76 receives incoming digital data streams over the communication line 30. The data selector 76 extracts the incoming digital video data received over the communication line 30 and transfers the incoming digital video data into the video queue 70. The data selector 76 extracts the incoming digital audio data over the

-17-

communication line 30 and transfers the incoming digital audio data into the audio queue 72. The data selector 76 extracts the incoming digital associated data over the communication line 30 and transfers the incoming associated data into the associated data queue 74.

5

For one embodiment, the data selector 76 receives packetized digital data streams over the communication line 30 from the satellite receiver 14. The data selector 76 decodes the header of each incoming packet to determine whether to transfer the incoming packet into
10 either the video queue 70, the audio queue 72, or the associated data queue 74.

For another embodiment, the data selector 76 receives a digitized representation of an analog video signal over the
15 communication line 30 from either the CATV receiver 16 or the television broadcast receiver 18. The data selector 76 extracts the video information from the incoming digitized video signal and assembles the video information into corresponding video packets in the video queue 70. The data selector 76 extracts the audio information from the
20 incoming digitized video signal and assembles the audio information into corresponding audio packets in the audio queue 72. The data selector 76 extracts associated data during the vertical blanking interval of each video frame of the incoming digitized video signal on the communication line 30. The data selector 76 assembles the

-18-

incoming associated data into associated data packets in the associated data queue 74.

The data selector 76 generates an interrupt to the processor 52 over an interrupt line 78 each time an incoming packet is placed in either the video queue 70, the audio queue 72, or the associated data queue 74. The interrupt to the processor 52 on the interrupt line 78 causes the processor 52 to read the incoming packets from the video queue 70, the audio queue 72, and the associated data queue 74 over the system bus 51. The processor 52 then distributes the incoming video packets from the video queue 70 to the graphics display subsystem 56 to generate a video image in the video window 40. The processor 52 distributes the incoming audio packets to the audio subsystem 62 to drive the speaker 24. The processor 52 reads the incoming associated data packets from the associated data queue 74 and then performs the video command and control functions specified in the incoming associated data packets.

The address filter 75 contains a data stream address for the computer system 10. The data selector 76 ignores incoming data streams that do not correspond to the data stream address. The data stream address may be written by the processor 52. The data stream address may specify the same address of the data stream or the destination address of the computer system 10 for the data stream.

25

-19-

Figure 4 illustrates a digitized representation of an analog video signal received by the data selector 76 from either the CATV receiver 16 or the television broadcast receiver 18 for one embodiment. The incoming digitized video signal on the communication line 30 comprises a series of video frames. Each video frame comprises a series of scan lines that carries both video and audio information. Each video frame further comprises a vertical blanking interval. The vertical blanking interval carries the associated data that corresponds to the video and audio information for each video frame.

10

Figure 5 illustrates the packetized digital data stream received by the data selector 76 over the communication line 30 for one embodiment. The incoming packetized digital data stream on the communication line 30 includes a video packet 80, an audio packet 82, and an associated data packet 84.

15

The video packet 80, the audio packet 82, and the associated data packet 84 each comprise a packet header and a packet payload. The packet header of the video packet 80, the audio packet 82 and the associated data packet 84 each include a time stamp (TIME_STAMP) that synchronizes the video, audio and associated data carried in the packets 80-84.

20

The video packet 80 includes a video payload that provides digital video data for display in the video display window 40. The

25

-20-

video packet 80 is identified as a packet that carries video data by the video identifier (VIDEO_ID) in the packet header.

5 The audio packet 82 includes an audio payload for transfer to the audio subsystem 64 to drive the speaker 24. The audio packet 82 is identified as a packet that carries audio data by the audio identifier (AUDIO_ID) in the packet header.

10 The associated data packet 84 includes an associated data payload that specifies interactive video command and control functions for the computer system 10. The associated data packet 84 is identified as a packet that carries associated data by the associated data identifier (DATA_ID) in the packet header.

15 For other embodiments, the associated data stream is carried via a chrominance key, a sideband transmission or an audio sub carrier. An embodiment of the command protocol contains commands that perform the following functions:

- 20
- 1) Specify coordinate scale
 - 2) Video screen position and scaling
 - 3) Screen background color
 - 4) Screen background pattern
 - 5) Text
 - 25 6) Placement region for text (height and width box)
 - 7) Font, size and color for text
 - 8) Graphic/icon for display
 - 9) Display graphic/icon at position with scale
 - 10) Ordering of graphic/text items for layering on the screen
 - 30 11) Define height and width and position of a selection region

-21-

- 12) Define command to be performed when selection region selected
- 13) Define color palette

5 Each command is pre-pended with an address and an identifier. The address specifies the address of the receiver (with suitable coding for "all" and sub-groups of possible receivers) and the identifier marks this as a display command (as opposed to other data that is synchronized with the video or audio).

10

One possible implementation of the above functions is illustrated by the following "object oriented" command set:

Define Object

Type: Text, Graphic, Icon, Sound, Cursor, Video

15 Window,

Selection Region, Execution Object, Object List

Content: <appropriate to object type>

Attributes: <appropriate to object type: for example,

text

20

attributes include font, size, color>

Instantiate Object

Background: Transparent, solid color, or repeated object (pattern)

Foreground: Visible/Invisible

25

Location: <x, y>

Size: <x,y>

Scale: <x, y>

Define coordinate scaling (low x, high x, low y, high y)

-22-

	Define Virtual Screen	(ID, object list)
	Display Virtual Screen	(ID, on/off)
	Free Object Instance	(ID list, <all>)
	Cache Object Instance	(ID list, <all>)
5	Define Instance Order	(ID list) (for overlapping objects)
	Move Object Instance	(ID, x, y)
	Copy Object Instance	(ID, new x, new y)

10 **Figure 6** illustrates the software architecture for the computer system 10 for one embodiment. The software for the computer system 10 includes a client runtime manager 102 and an operating system 100. The operating system 100 comprises a set of video driver routines 108, a set of audio driver routines 104, a data modem driver 106, a pointing
15 device driver 110, and a set of display window control routines 112.

The client runtime manager 102 reads incoming packets from the video queue 70, the audio queue 72, and the associated data queue 74 using the data modem driver 106. The data modem driver 106
20 manages the video queue 70, the audio queue 72, or the associated data queue 74 and processes the interrupts on the interrupt line 78 to the processor 52. The client runtime manager 102 distributes the incoming video data from the video queue 70 to the graphics display subsystem 56 using the video driver routines 108. The video driver
25 routines 108 enable the client runtime manager 102 to display the

-23-

incoming video data stream within the video window 40 on the display surface 50 of the display device 12.

5 The client runtime manager 102 distributes the incoming audio data from the audio queue 72 to the audio subsystem 62 using the audio driver routines 104. The audio driver routines 104 enable the client runtime manager 102 to drive the speaker 24 with the incoming audio information from the audio queue 72.

10 The client runtime manager 102 reads the incoming associated data packets from the associated data queue 74 and executes the command and control interactive video functions specified by each associated data packet. The associated data packets are synchronized to the video and audio packets via the TIME_STAMP in each packet
15 header. The associated data packets from the associated data queue 74 include commands that specify the placement of graphic objects on the display device 12. The associated data packets also include commands for placement for graphical windows on the display device 12. The associated data packets also specify graphical objects for
20 rendering on the display device 12.

The associated data packets also specify selection regions for the display surface 50 of the display device 12. In addition, the associated data packets includes commands for execution upon selection of one
25 of the specified selection regions by the mouse pointing device 22.

-24-

The associated data packets also include commands for the presentation placement and sizing of the video window 40 on the display surface 50.

- 5 The display window control routines 112 enable the client runtime manager 102 to define the video display window 40 according to the specifications provided by the associated data packets. The pointing device driver 110 enables the client runtime manager 102 to detect the selection of one of the selection regions defined by the
10 associated data.

Figure 7 is a flow diagram illustrating the functions of the client runtime manager 102 for one embodiment. The client runtime manager 102 is driven by interrupts from the data modem 58 over the
15 system bus 51. At decision block 120, the client runtime manager 102 determines whether an incoming video packet is available from the video queue 70. If an incoming video packet is available at decision block 120 then control proceeds to block 122. At block 122 the client runtime manager 102 updates the content of the video display 40
20 using the video driver routines 108 to communicate with the graphics display subsystem 56. Thereafter, the client runtime manager 102 waits for another interrupt from the data modem 58.

At decision block 124, the client runtime manager 102
25 determines whether an incoming audio packet is available from the

-25-

audio queue 72. If an incoming audio packet is available from the audio queue 72 then control proceeds to block 126. At block 126 the client runtime manager 102 invokes the audio driver routines 104 to play out the incoming audio packet to the audio subsystem 62. The
5 client runtime manager 102 transfers the audio packet payload audio data to the audio subsystem 62 to drive the speaker 24. Thereafter, the client runtime manager 102 awaits another interrupt from the data modem 58.

10 At decision block 128, the client runtime manager 102 determines whether an incoming associated data packet is available in the associated data queue 74. If an associated data packet is not available from the associated data queue 74 then the client runtime manager 102 waits the next interrupt from the data modem 58.

15 If an associated data packet is available from the associated data queue 74 at decision block 128, then control proceeds to block 130. At block 130, the client runtime manager 102 reads the associated data packet from the associated data queue 74 and performs the interactive
20 command and control functions specified by the incoming associated data packet. Thereafter, the client runtime manager 102 awaits the next interrupt from the data modem 58.

-26-

Figure 8 illustrates an example arrangement of video and display data on the display surface 50 which is generated under content programmer control with the techniques described herein.

5 In the foregoing specification the invention has been described with reference to specific exemplary embodiments thereof. It will, however, be evident that various modifications and changes may be made thereto without departing from the broader spirit and scope of the invention as set forth in the appended claims. The specification
10 and drawings are accordingly to be regarded as illustrative rather than a restrictive sense.

-27-

CLAIMS

What is claimed is:

1. A method for providing a video display image, comprising the
5 steps of:
 - receiving a video data stream and an associated data stream
corresponding to the video data stream;
 - displaying a video image defined by the video data stream on a
display device and performing an interactive command function
10 specified by the associated data stream.
2. The method of claim 1, wherein the video data stream is
received during a series of scan intervals of a video frame and the
associated data stream is received during a vertical blanking interval
15 of the video frame.
3. The method of claim 1, wherein the video data stream and the
associated data stream each comprise a series of digital
communication packets, each digital communication packet having
20 an identifier that indicates the video data stream or the associated data
stream.
4. The method of claim 1, wherein the interactive command
function comprises a command that specifies a set of parameters that

-28-

determines an area on a display surface of the display device for placement of a video display window that contains the video image.

5. The method of claim 1, wherein the interactive command
5 function comprises a command that specifies a set of parameters that determines an area on a display surface of the display device for placement of a graphical object that corresponds to the video image.
6. The method of claim 5, wherein the interactive command
10 function comprises a command that specifies a set of pixel data or graphical description commands that correspond to the graphical object.
7. The method of claim 1, wherein the interactive command
15 function comprises a command that specifies a set of parameters that determines an area on a display surface of the display device for placement of a selection window that corresponds to the video image.
8. The method of claim 7, wherein the interactive command
20 function comprises a command that specifies an interactive command that is performed if a user selects the selection window.
9. A method for creating a display in a computer system, comprising the steps of:

-29-

receiving a video stream and a data stream synchronized to the video stream, the data stream specifying at least one graphical command;

generating a video scene defined by the data stream onto a
5 portion of a display screen of the computer system;

performing a graphical operation on the computer screen defined by the command.

10. The method of claim 9, further comprising the steps of
10 receiving an audio stream synchronized to the video stream and playing the audio stream through an audio subsystem of the computer system.

11. The method of claim 9, wherein the video stream is coded in a
15 series of video scan intervals of a video signal and the data stream is coded in a series of nonvideo scan intervals of the video signal.

12. The method of claim 9, wherein the data stream specifies a graphical object for display on the display screen.
20

13. The method of claim 9, wherein the graphical command specifies a color palette for the display screen.

14. The method of claim 9, wherein the graphical command
25 specifies placement of a graphical object on the display screen.

-30-

15. The method of claim 9, wherein the graphical command specifies a set of parameters that define selection regions on the display screen.

5

16. The method of claim 15, wherein the graphical command specifies a selection device for picking the selection regions on the display screen.

10 17. The method of claim 9, wherein the graphical command specifies text for display on the display screen.

18. The method of claim 17, wherein the graphical command specifies placement and format of the text including font, color, and
15 point size.

19. The method of claim 9, wherein the data stream comprises a series of data packets and wherein the step of receiving a video stream and a data stream synchronized to the video stream includes the step
20 of filtering the data packets according to a destination address of each data packet.

20. The method of claim 9, wherein the data stream comprises a series of data packets and wherein the step of receiving a video stream
25 and a data stream synchronized to the video stream includes the step

-31-

of filtering the data packets according to a source address of each data packet.

1/8



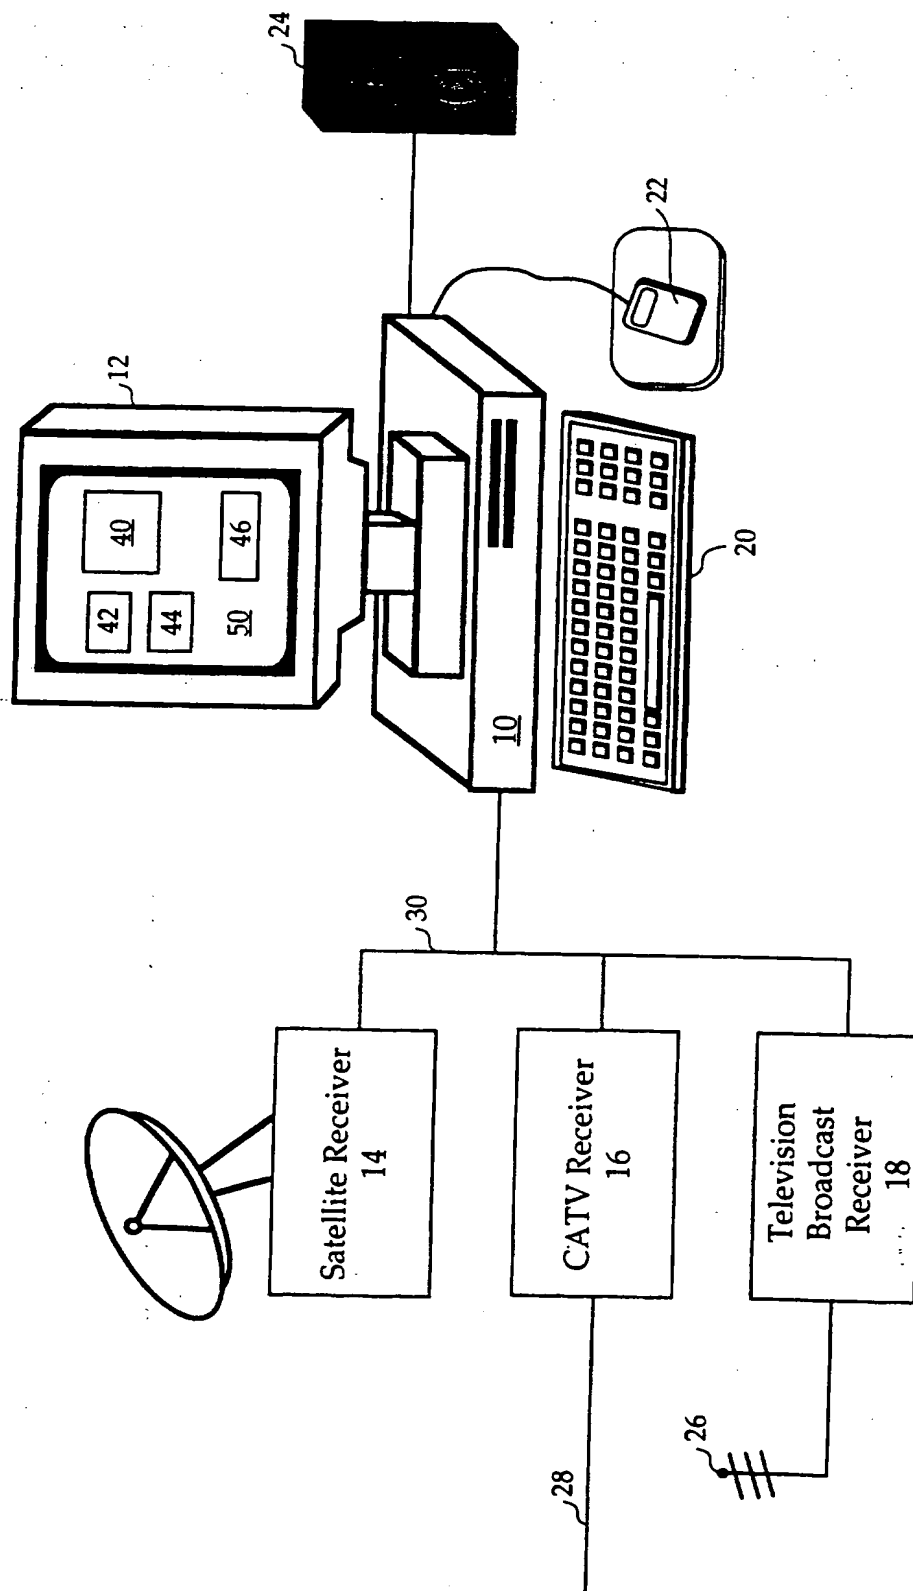


Figure 1

2/8

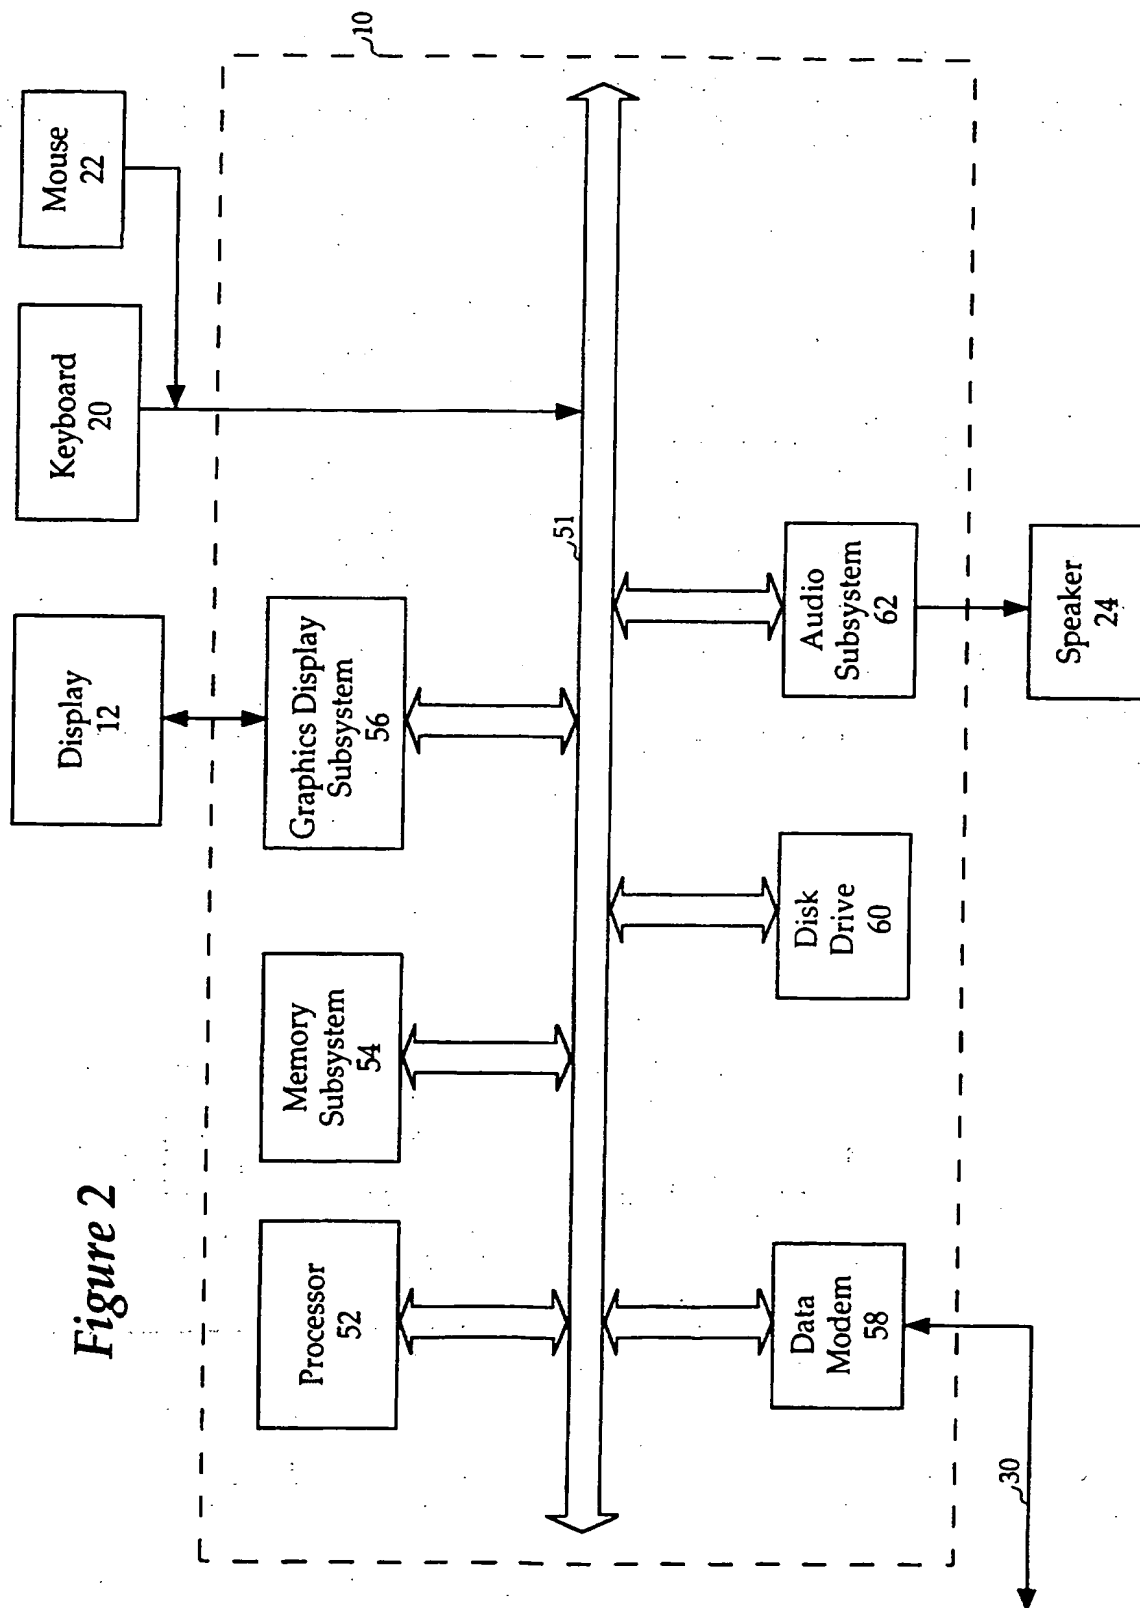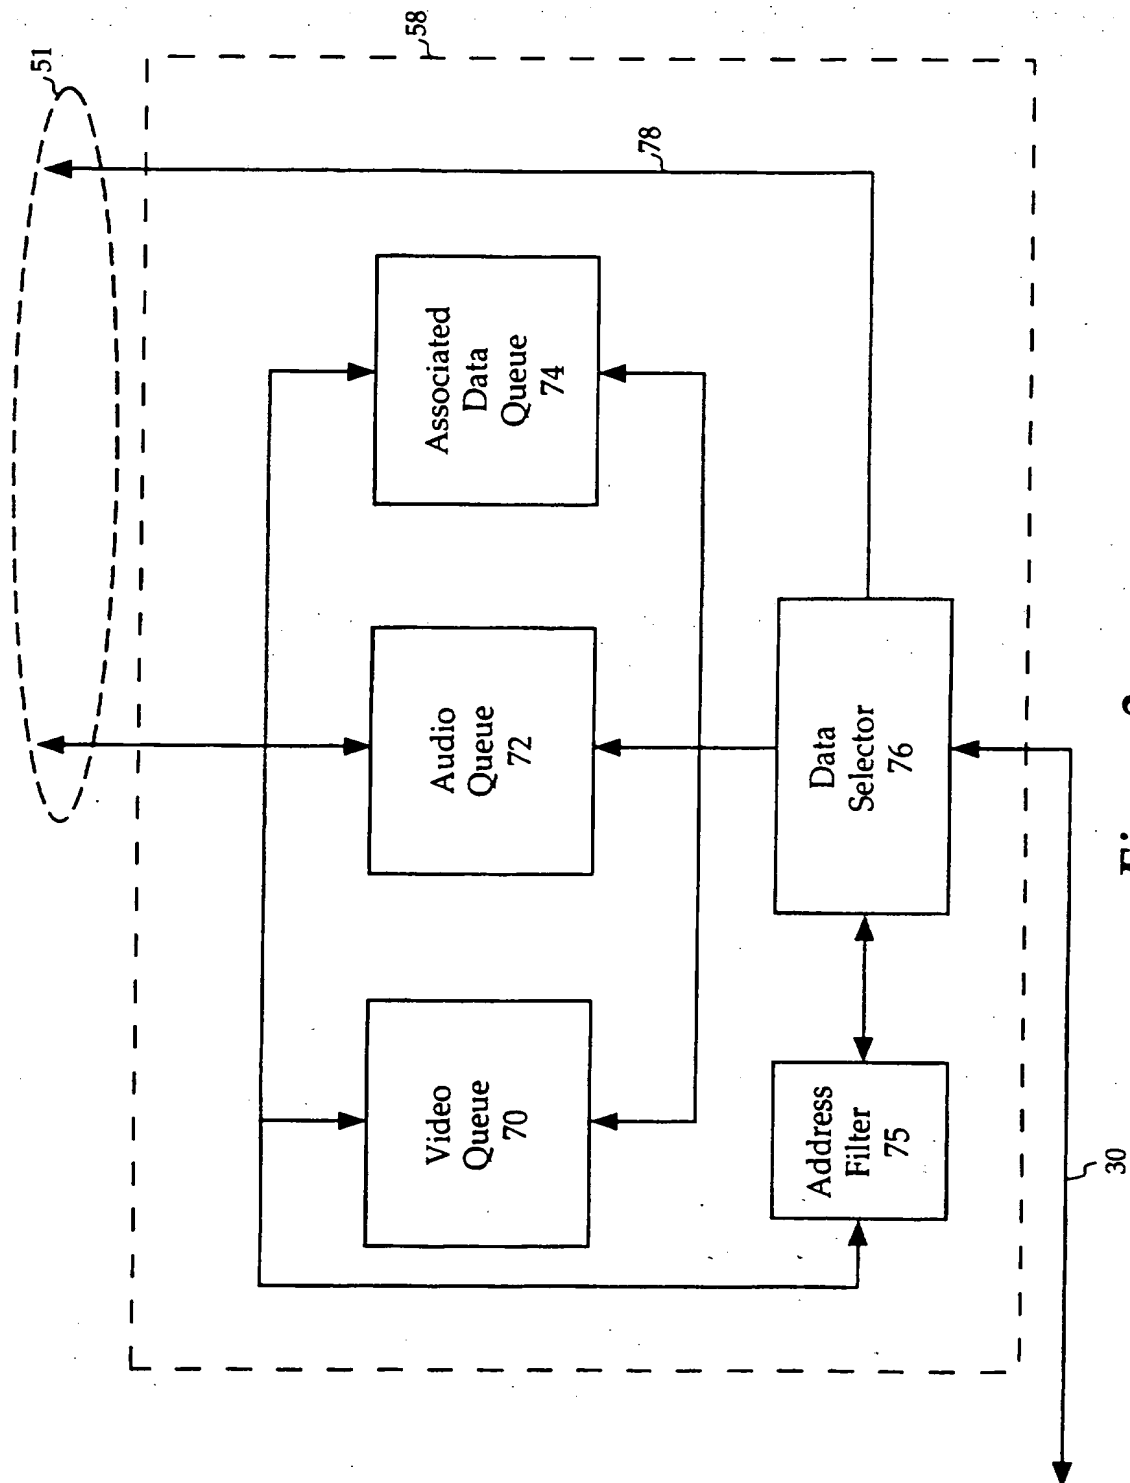

3/8

*Figure 3*

4/8

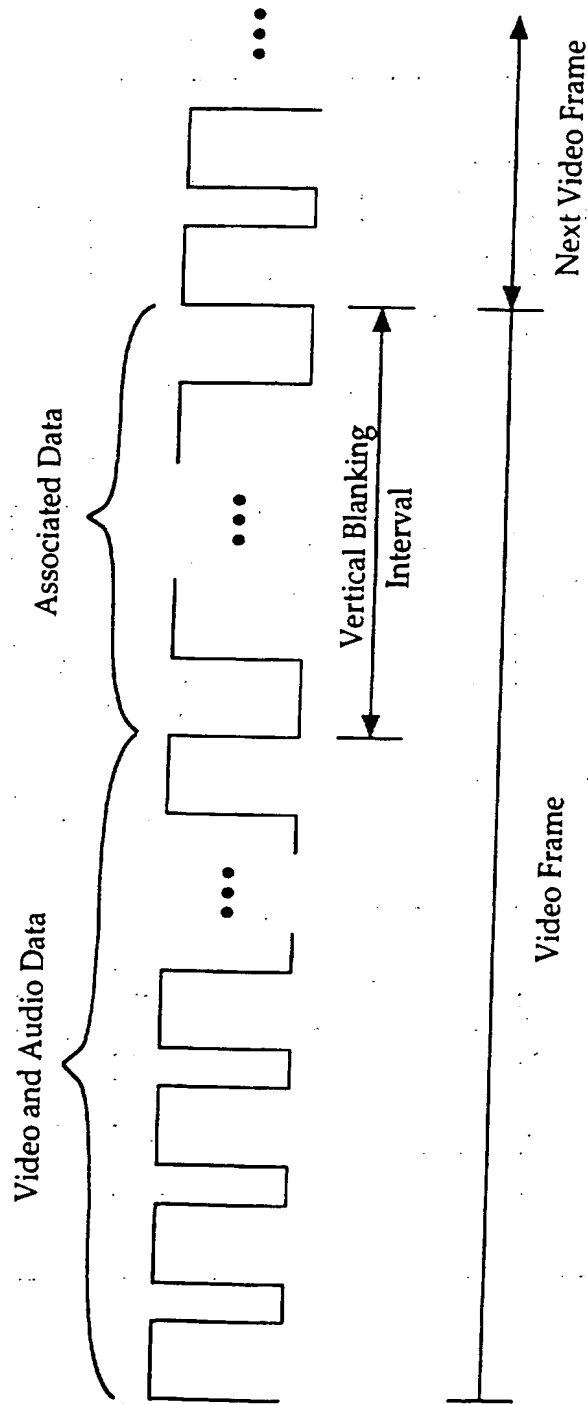


Figure 4

5/8

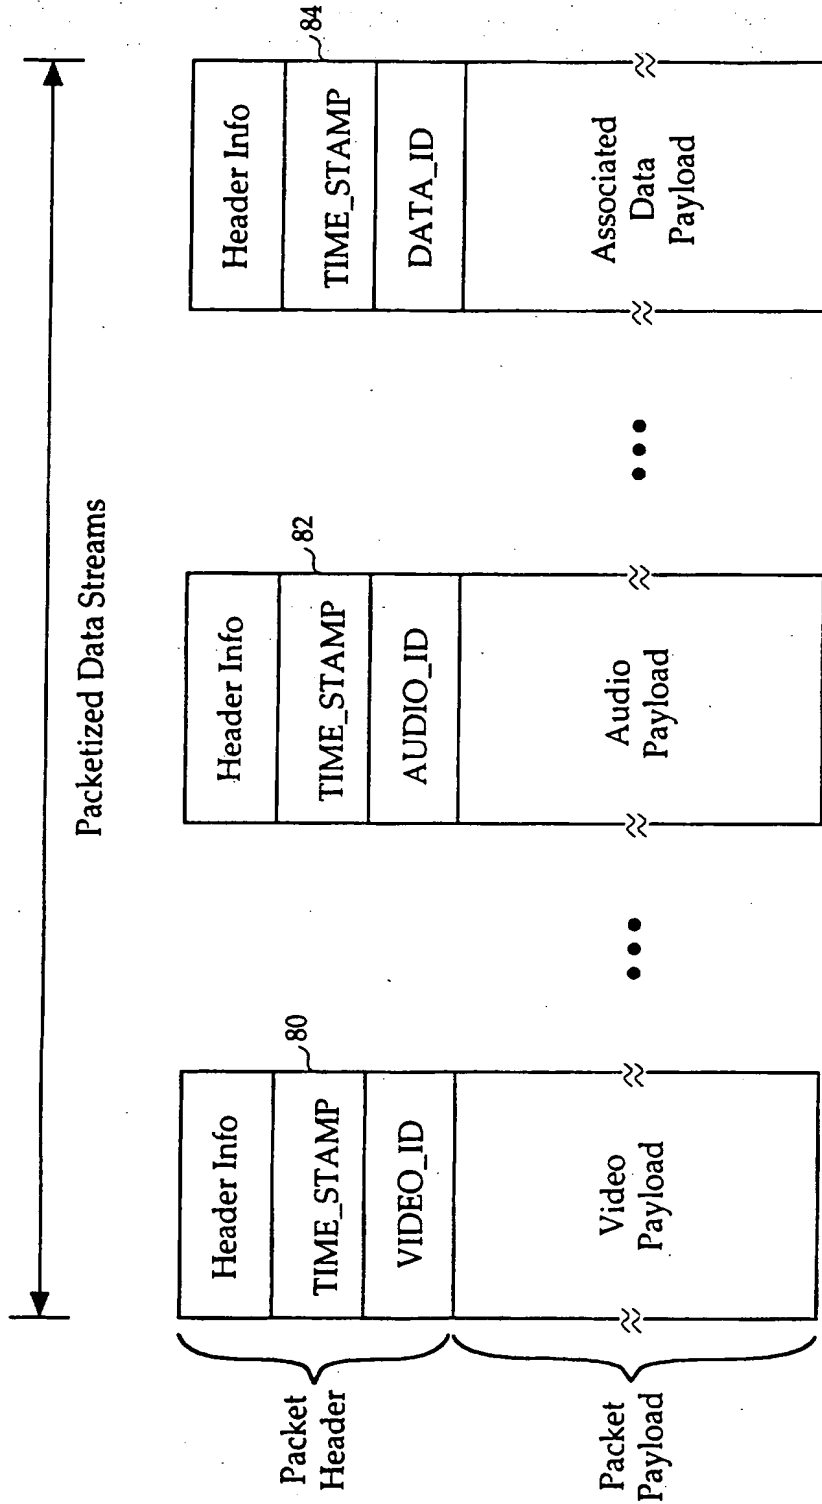
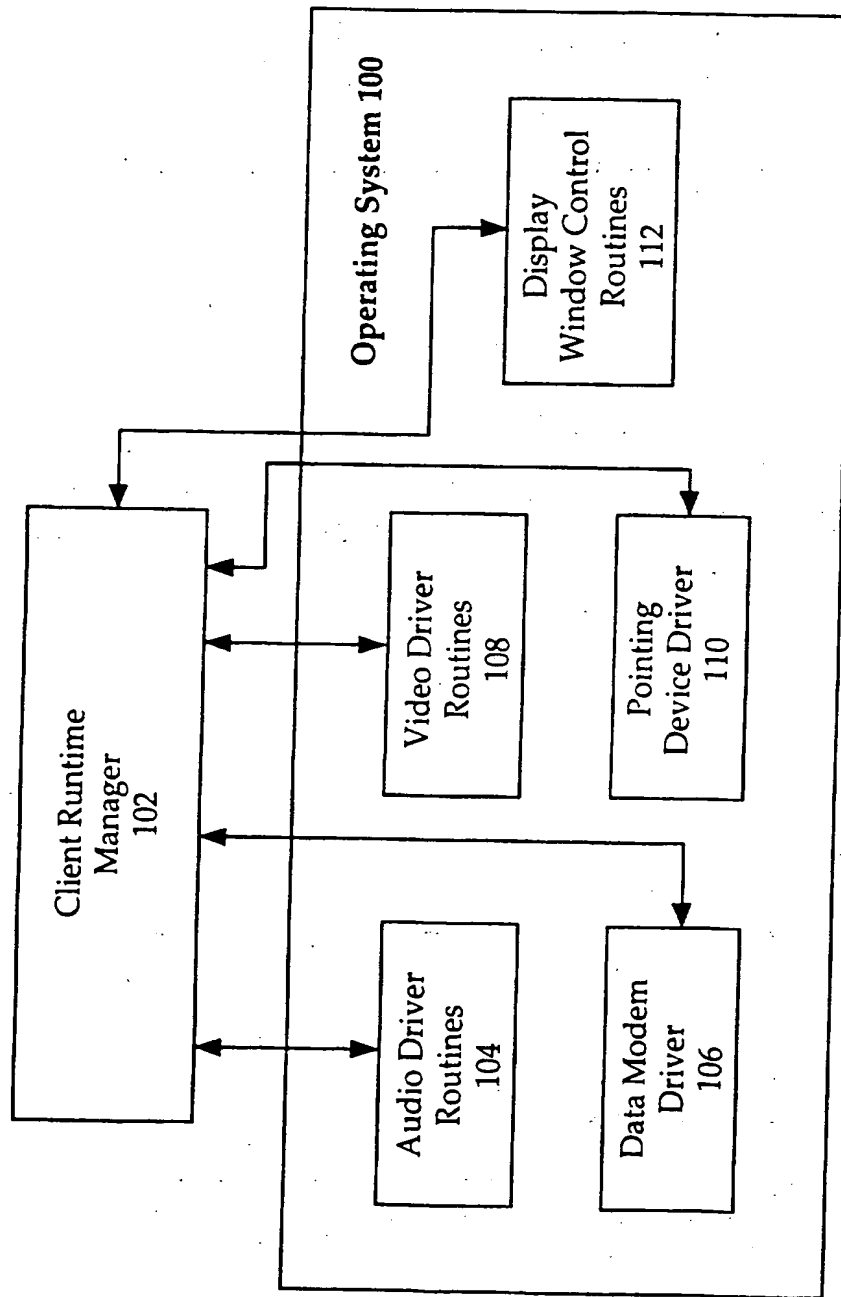
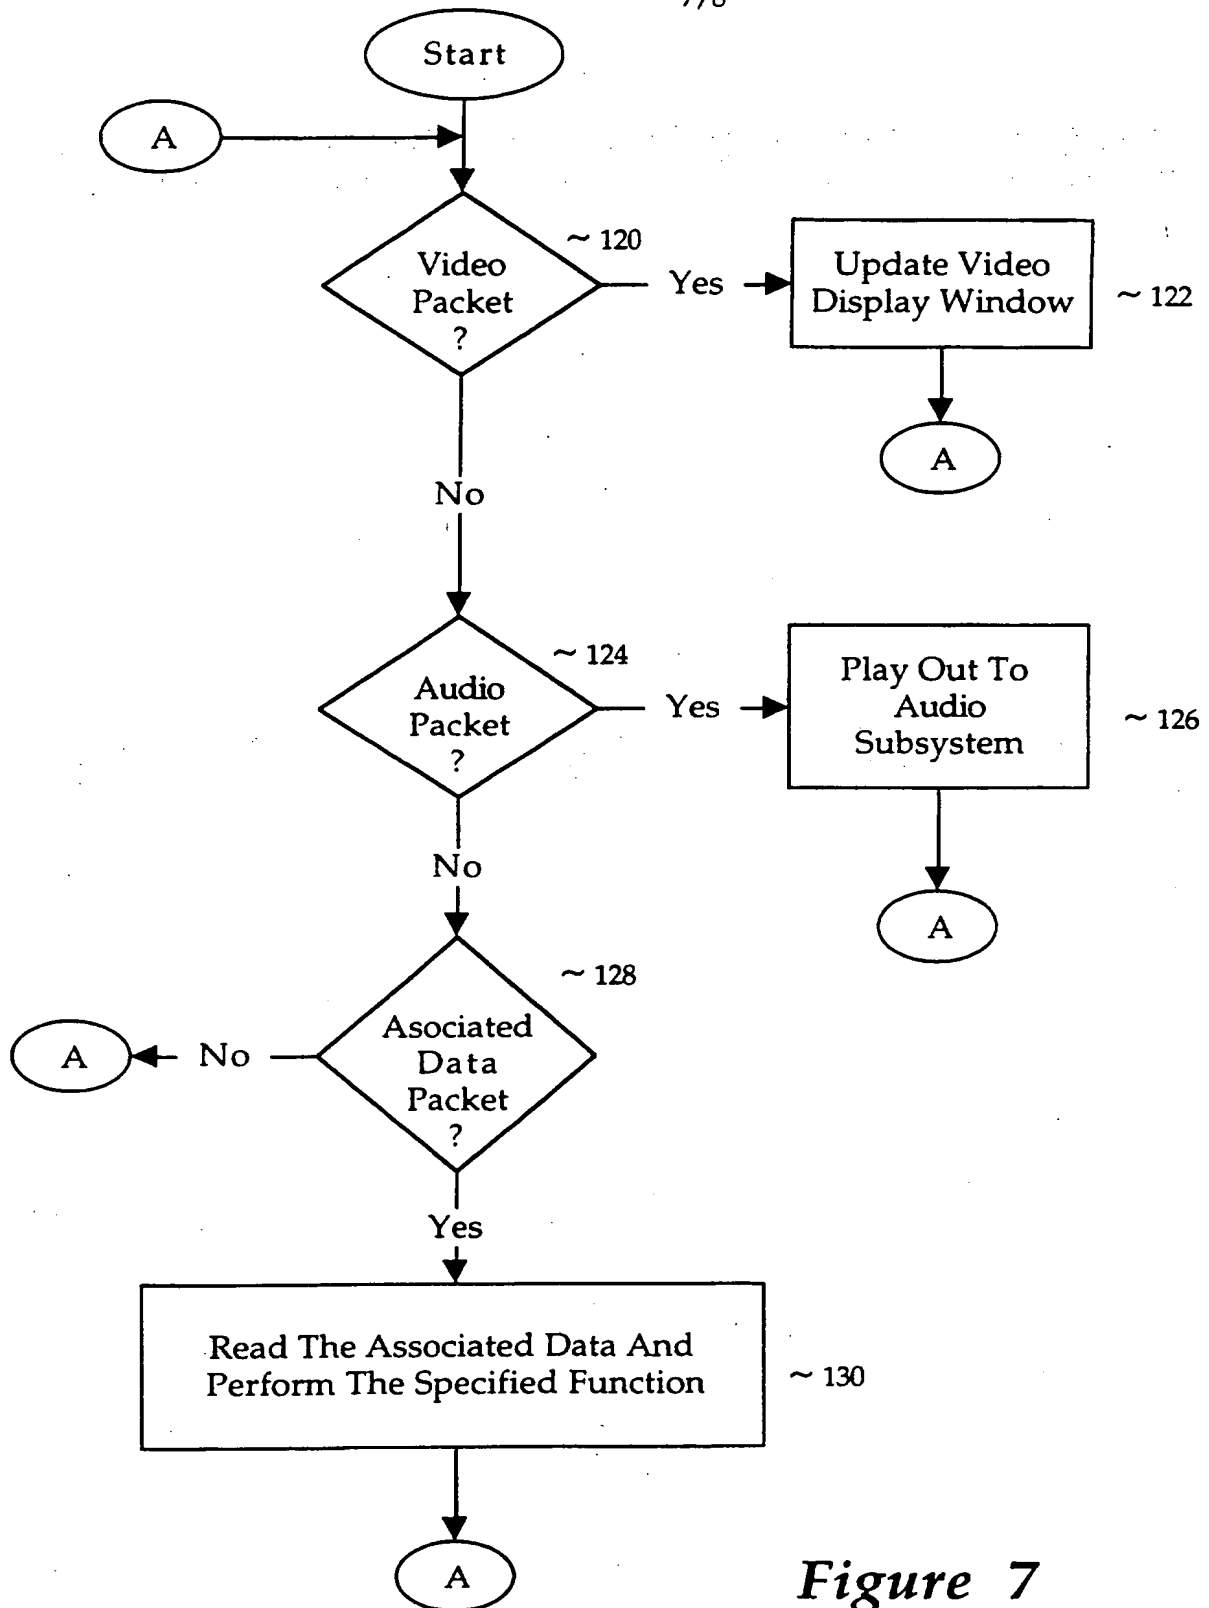


Figure 5

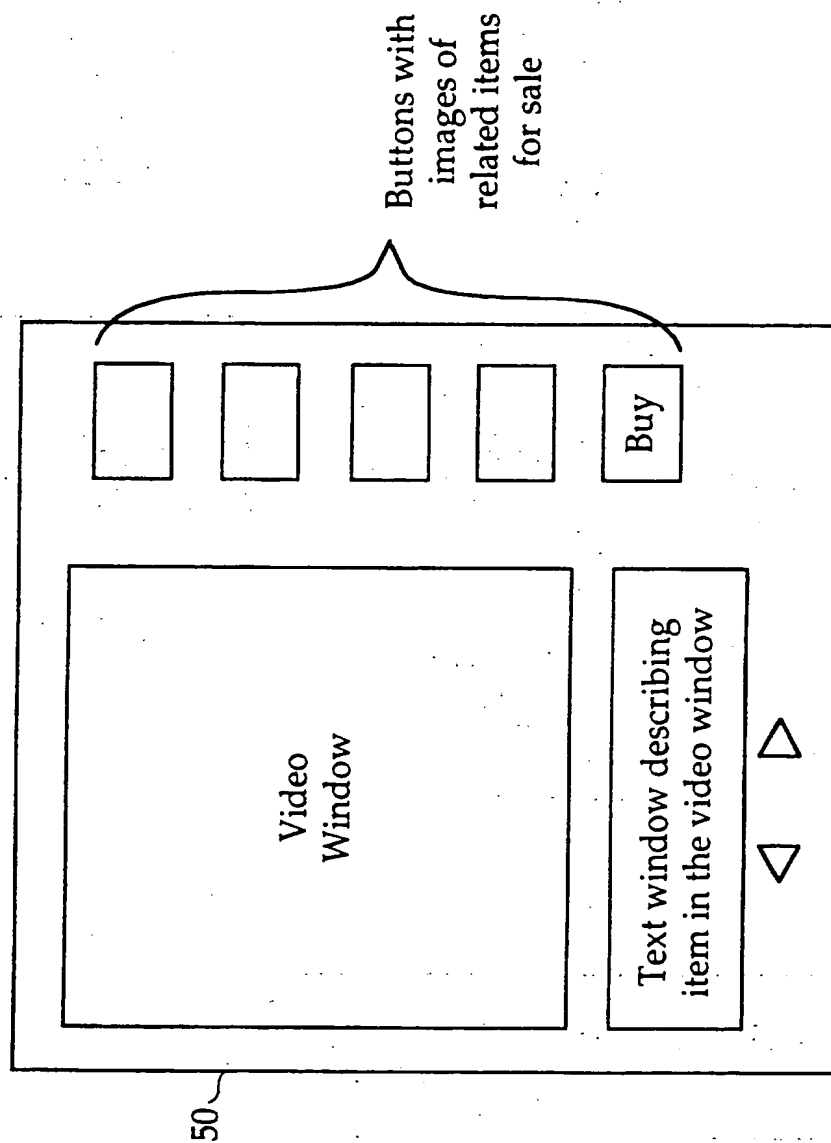
6/8

*Figure 6*

7/8

*Figure 7*

8/8

*Figure 8*

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US95/10662

A. CLASSIFICATION OF SUBJECT MATTER

IPC(6) : H04N 5/50

US CL : 348/563, 569, 154, 13, 335, 478, 460; 395/154

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : Please See Extra Sheet.

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X,P ---- Y	US, A, 5,390,027 (HENMI ET AL) 14 February 1995, figures 1a-1c, 2a-2b and col. 7, lines 49-59.	1-3 ----- 9, 11, 17, 19 and 20
X --- Y	US, A, 5,260,788 (TAKANO ET AL) 09 November 1993, figure 1a-1c and 2a-2b	1-3 ----- 9,11,17,19 and 20
A	US, A, 5,210,611 (YEE ET AL) 11 May 1993, col. 2, lines 16-40; col. 7, lines 3-57; col. 10, lines 43-51; col. 11, line 63 to col. 12, line 35.	1-20
A,P	US, A, 5,404,393 (REMILLARD) 04 April 1995, figure 1	1-20

☐ Further documents are listed in the continuation of Box C. ☐ See patent family annex.

* Special categories of cited documents:	* T	later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
* A document defining the general state of the art which is not considered to be part of particular relevance	* X	document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
* E earlier document published on or after the international filing date	* Y	document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
* L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	* &	document member of the same patent family
* O document referring to an oral disclosure, use, exhibition or other means		
* P document published prior to the international filing date but later than the priority date claimed		

Date of the actual completion of the international search

22 SEPTEMBER 1995

Date of mailing of the international search report

17 OCT 1995

Name and mailing address of the ISA/US
Commissioner of Patents and Trademarks
Box PCT
Washington, D.C. 20231

Facsimile No. (703) 305-3230

Authorized officer

GLEN BURGESS *Joni Hill*
Telephone No. (703) 305-4792

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US95/10662

B. FIELDS SEARCHED

Minimum documentation searched

Classification System: U.S.

348/563, 569, 154, 13, 335, 478, 460; 395/154; 348/600, 596, 589, 564, 552, 484, 478, 474, 473, 468, 462, 461,
460, 20, 12, 7; 395/155, 159, 161, 152, 153; 364/514

This Page Blank (uspto)

Best Available Copy

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.

This Page Blank (uspto)